


001/00998
21 SEP 2000 21.09.00

#2

4

PA 297514

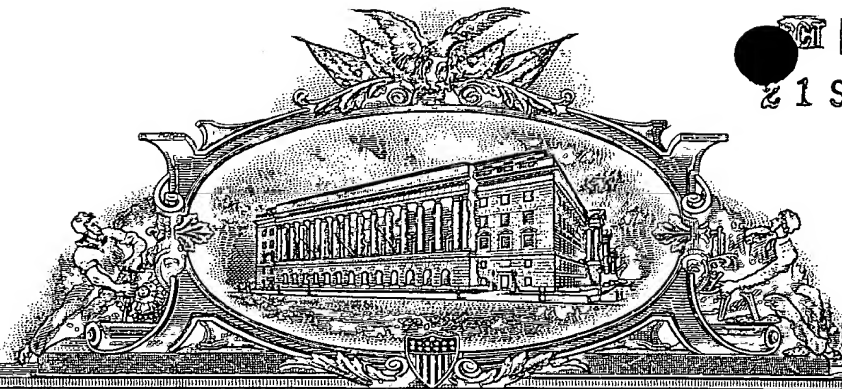

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office


CA 00100998

September 15, 2000

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 60/152,457

FILING DATE: September 03, 1999

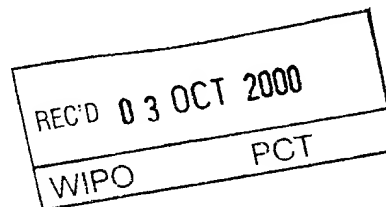

PRIORITY
DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)



By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS

P. R. Grant

P. R. GRANT
Certifying Officer

JCS44 U.S. PTO
09/03/99

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

A/PROV

This is a request for filing a PROVISIONAL APPLICATION FOR A PATENT under 37 CFR 1.53 (b)(2).

Docket Number		14081-1USPR		Type a plus sign (+) inside this box →	+
INVENTOR(S)/APPLICANT(S)					
LAST NAME	FIRST NAME	MIDDLE INITIAL	RESIDENCE (CITY AND EITHER STATE OR FOREIGN COUNTRY)		
Mountassir	M'Hammed		Montreal, Canada		
TITLE OF THE INVENTION (280 characters max)					
"METHOD OF OPTIMIZING PARAMETER VALUES IN A PROCESS OF PRODUCING A PRODUCT"					
CORRESPONDENCE ADDRESS					
James Anglehart SWABEY OGILVY RENAULT 1981 McGill College Avenue, Suite 1600, Montréal					
STATE	Québec	ZIP CODE	H3A 2Y3	COUNTRY	Canada
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/>	Specification, claims, abstract	Number of Pages	27	<input type="checkbox"/>	Small Entry Statement
<input checked="" type="checkbox"/>	Drawings	Number of Sheets	2	<input type="checkbox"/>	Other (specify)
METHOD OF PAYMENT (check one)					
<input type="checkbox"/>	A check or money order is enclosed to cover the Provisional filing fees			PROVISIONAL FILING FEE AMOUNT (\$)	\$150.00
<input checked="" type="checkbox"/>	The Commissioner is hereby authorized to charge filing fees and credit Deposit Account Number.			19-5113	

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

☒ No

☐ Yes, the name of the U.S. Government agency and the Government contract number are: _____

Respectfully submitted,

SIGNATURE

James Anglehart

Date Sept. 2, 1999

TYPED or PRINTED NAME James Anglehart

REGISTRATION NO.
(if appropriate)

38,796

☐ Additional inventors are being named on separately numbered sheets attached hereto

PROVISIONAL APPLICATION FILING ONLY

Burden Hour Statement: This form is estimated to take 2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Office of Assistance Quality and Enhancement Division, Patent and Trademark Office, Washington, DC 20231, and to the Office of Information and Regulatory Affairs, Office of Management and Budget (Project 0651-0037), Washington, DC 20503. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO Assistant Commissioner for Patents, Washington, DC 20231.


In the United States Patent and Trademark Office

"Express Mail" mailing label number: EH576252802US

Date of Deposit: September 3, 1999

I hereby certify that the attached U.S. Patent Application, informal drawings, transmittal letter, verified statement, declaration and power of attorney, information disclosure statement, and application fee are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner of Patents, Washington, D.C. 20231.

Randall L. Reed


(Signature)

September 3, 1999

Assistant Commissioner of Patents
Box: Provisional Patent Application
Washington, D.C. 20231

Dear Sir:

Transmitted herewith for filing is the Provisional Patent Application of:

Inventor: Mountassir, M'Hammed

For: Method of Optimizing Parameter Values in a Process of Producing a Product

Attorney Docket Number: 14081-1USPR

Enclosed are:

1. A Specification with 26 pages and 22 claims.
2. 2 sheets of informal drawings.
3. A Copy of a Provisional Application for Patent Cover Sheet, signed on September 2, 1999 by James Angelhart Reg. # 38,796.
4. An Abstract of the invention of 1 page.
5. A return receipt post card.

Respectfully submitted,

Date: September 3, 1999



Randall L. Reed
Attorney at Law
One Beacon Heights Drive
Rouses Point, NY 12979
Tel: 518-297-3033
Reg. No. 31,559

0015457-090399

METHOD OF OPTIMIZING PARAMETER VALUES IN A PROCESS OF PRODUCING A PRODUCT

BACKGROUND OF THE INVENTION

Field of th invention

5 The invention relates to the process optimization field, and more particularly to a method of optimizing parameter values in a process of producing a product which is characterized by properties affected by the selected parameter values. This invention is applicable in different industries, such as the pharmaceutical, chemical, cosmetics, plastics, petrochemical, agriculture, metallurgy and food industries, as well as many
10 other commercial and industrial applications.

Description of prior art

Processes for production of complex compositions such as those found in many pharmaceutical products generally require the mixing of many ingredients according to specific process parameters regarding formulation and production technology, to provide
5 the product with properties at a level offering satisfactory performance according to predetermined specifications. In such complex production processes, it is not unusual that some process parameters involved exhibit interfering effects on the desired properties, further complicating the process design. Where possible, the designer may try to adapt the set of process parameters from known data derived from previous similar processes, and/or rely on conventional trial-and-error experimental schemes to optimize
20 the set of process parameters values, in order to meet the product specifications. However, as the processes become more complex, optimization in such multidimensional space with high accuracy requirements turns out to be an extremely difficult task, even for the highly skilled designer. That limitation is particularly
25 problematic in the design of pharmaceutical products, where one or more active substances mixed with a variety of excipients (e.g. carriers) must be produced in the form of a stable and highly effective standard delivery system such as a tablet, capsule, suspension, cream or injection, or even controlled release systems such as skin carriers and implants.

30 In the past years, many techniques have been developed to assist the process designer or formulator in optimizing values of parameters governing processes. These

techniques aim at quantify existing relations between parameters and associated desired product performance characteristics. A conventional technique known as the Full Factorial Matrix (FFM) method consists of statistically deriving a behavior relations for the properties from a set of experimental runs of the process using selected initial values for the parameters. The established model being generally nonlinear, optimized parameter values are then derived using an optimization method such as the Multisimplex method described in "*Practical Methods of Optimization*" J, Wiley & Sons, Chichester, 2d, (1987), which essentially consists of linearizing the behavior functions related to the parameters according to straight lines or planes of different random directions. For any given property behavior relation of n parameters to be optimized in order to either minimize or maximize that behavior relation with or without constraints on the parameter values, a recursive estimation of the property is then performed using an initial set of parameter values according to a selected direction, until the obtained value for the property does not significantly vary in that direction. Then, a last unfavorable set of parameters is used as a new starting point for a following recursive estimation according to a different direction. Successive recursive estimation steps are performed until the resulting value for the property no longer significantly vary in any new direction. When applied to a model comprising a plurality of property behavior relations, the Multisimplex method allows a unique objective function to be created by proper transformation of the relations to adapt to different scales and/or units and by associating a relative importance weight to each property, either subjectively or through fuzzy logic algorithms.

The known optimization processes based on Full Factorial Matrix-Multisimplex methods suffer from several drawbacks. As a general rule, the number of experimental runs required to obtain a model of sufficient reliability is proportional to the total number of significant parameters involved. Therefore, the cost and time frame of the experimental work will therefore be essentially proportional to the number of runs required. Although a variant of the method known as the Fractional Factorial Matrix has been proposed in order to reduce the number of runs to be performed, the provided reduction of experimental runs may not significantly reduce the total cost and time frame of the work required to complete the design of a complex product involving many

production technologies. While adequate formulations complying with constraints imposed on the parameter values can nevertheless be obtained, these formulations generally cannot be qualified as optimal when comparing actual property performance with desired property values set forth in the product specifications.

5 A technique which attempts to improve parameter optimization in process design is disclosed in European Patent Office laid-open patent application publication number 0,430,753 dated June 5, 1991 and in US patent No. 5,218,526 issued on June 8, 1993 to Mozzo. According to the technique in Mozzo, from a set of property relations expressed in terms of parameters which is obtained by standard statistical methods
10 using the results of a number of experimental runs of the process, a corresponding set of property relations expressed in terms of weighted parameters is derived. For each actual value of a parameter, a first weighting is expressed as the ratio of: (a) the deviation of the actual value from the mean value of the parameter over the experimental range, on (b) the range between extreme values for that parameter over the experimental range. Then, a goal function is established in term of deviations between weighted values of property values as estimated by the property relations and corresponding weighted values of specified goal values for the properties. For each goal value of a property, a second weighting is expressed as the ratio of: (a) the deviation of the actual value from the mean value of the property over the experimental range, on (b)
20 the range between extreme values for that property over the experimental range. Then, according to a recursive geometric algorithm aimed at successively minimizing the established goal function, a set of optimal parameter values is generated. While being an improvement over the conventional Full/Fractional Factorial Matrix - Multisimplex methods regarding the capability to consider specified goal values for the properties, the
25 weightings as taught by Mozzo do not reflect the relative importance of the properties involved, and that limitation may therefore affect the convergence of the algorithm toward an optimal solution.

A review of modern techniques and software systems for the design of pharmaceutical product formulations is given in "*Intelligent Software System For*
30 *Pharmaceutical Product Formulation*" R.C. Rowe, Pharmaceutical Technology, March 1997. In that paper, expert systems, rule induction algorithms, case-based reasoning

5 algorithms, neural networks and genetic networks are presented as modern tools for
supporting formulation design, and a number of available software systems using some
of these tools are summarized. As indicated in the Rowe paper, although a
knowledgeable expert system could be a powerful tool to assist the process designer in
the formulation task, its development is generally a high risk, time consuming and
expensive process. Rule induction is a knowledge-based algorithm which allows
hierarchical classification of objects, using statistical methods which are found generally
effective only if the input data is continuous, which is often not the case in practice.
Moreover, since rule induction is limited to establishing whether or not a given object is
close to another, it generally cannot provide an optimal solution. Case-based reasoning
is a knowledge-based iterative technique which can be used to design formulations,
which consists of matching the desired specifications for the product with the
specifications of the most relevant known formulation(s), and adapting the selected
formulation(s) as necessary, followed by an evaluation. Although effective for optimizing
the parameters of a variant process from a family of similar processes and
corresponding formulations, case-based reasoning generally cannot be used where the
design of a significantly different formulation is contemplated. As to neural networks, in
which each neuron input is modified by a weight associated with that neuron, they
appear to be effective tools for assisting formulation design only in cases where no
constraint applies on either the parameter or property values, such cases being rarely
found in practice. Finally, regarding the genetics algorithms, they are cyclic methods
based on Markov chains for predicting from a starting point a solution likely to result from
a sequence of operations, in order to allow making changes to obtain a desired solution.
Since these changes are generally made arbitrarily, in most cases, the resulting solution
cannot be considered as optimal.

SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide a systematic method of
optimizing parameter values in a process for producing a product which minimizes the
number of experimental runs required to obtain an optimal solution complying with the
product specifications.

According to the above object, from a broad aspect of the present invention, there is provided a method of optimizing parameter values in a process of producing a product, the process being essentially controlled by a set of n parameters X_i affecting a set of k properties Y_j characterizing the product. The method comprises the steps of:

- 5 i) assigning values to a set of k property weights w_j representing relative importance of the properties Y_j for the characterization of the product; ii) establishing property behavior mathematical relations giving an estimated property Ye_j for each property Y_j in terms of the parameters X_i from given parameter data and associated property data; iii) using the property weights w_j to establish a goal function in terms of property weighted
10 deviations between the estimated properties Ye_j and corresponding specified goal values for the properties Y_j ; and iv) optimizing the goal function to generate a set of n optimal parameter values for the parameters X_i .

According to a further broad aspect of the present invention, there is provided a method of producing a pharmaceutical product using optimized process parameter values, the process being essentially controlled by a set of n parameters X_i characterizing a formulation for the product, the parameters X_i affecting a set of k properties Y_j characterizing the product. The method comprises the steps of: a) conducting a number of I of experimental runs of the process each using a selected distinct set of values for the parameters X_i covering substantially all extreme values
20 within a chosen range of values for each one of the parameters X_i , wherein I is at least equal to $n + 1$ and is substantially less than a number used in the Fractional Factorial Matrix method; b) measuring values for the properties Y_j characterizing the product in each of the I experimental runs, whereby parameter data and associated property data are obtained from the selected distinct set of values for the parameters X_i and the
25 measured values for the properties Y_j , respectively; c) determining an importance of the properties Y_j for the characterization of the product, comparing the importance of the properties Y_j relative to one another, and assigning values to a set of k property

weights w_j representing a relative importance of the properties Y_j for the characterization of the product; d) calculating a set of optimal parameter values for the parameters X_i using the measured values for the properties Y_j and the assigned values of the set of k property weights w_j ; and e) producing the pharmaceutical product using the optimized process parameter values X_i calculated in the previous step.

BRIEF DESCRIPTION OF THE DRAWING

The invention will be better understood by way of the following detailed description of a preferred embodiment with reference to the appended drawings, in which:

Fig. 1 is a block diagram of a software system that can be used to carry out the method according to the present invention according to the preferred embodiment; and

Fig. 2 is a flow chart representing the preferred embodiment of the method according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

In the following description, a preferred embodiment of the present invention applied to product formulation design will be described. However, it is to be understood that the present invention can be also be used to optimize parameter values of processes related to the production of many types of products which cannot be associated with a formulation, while being characterized by a number of properties affected by process parameters, such as biotechnological products, electronic components, etc.

Referring now to Fig. 1, there is generally designated at 10 a computer system which is programmed to carry out a method according to the present invention. The system preferably comprises a knowledge base 12 where prior formulation/process data and competing products data are stored. For the purpose of pharmaceutical formulation design, knowledge base 12 contains process data related to ingredient proportions, experimental conditions and results over time, production technologies used, etc. The system 10 further comprises a property weighting module 14 which generates a weight value for each one of a number k of identified properties according to an initial modeling of the problem and property comparison data presented to the module 14. System 10

66000-25709
50157-0000

5 further comprises an evaluation module 18 fed by the property weights generated by module 14, to generate a global relative importance vector of dimension $[k]$ for the k properties. System 10 is provided with an experimental data entry module 16 through which property values obtained from experimental runs using different sets of parameter values for the process can be entered and stored for later use by several modules of system 10. Linked to receive data from modules 12, 14 and 16, is an evaluation module 18 which can generates a ranking of the sets of property values selected from the knowledge base and the optimal set of parameter values obtained through optimization. System 10 further comprises a parameters reduction module 22 to retain only those parameters having a significant effect on the considered properties. Module 22 is particularly useful in cases where the number of parameters involved is relatively large, usually greater than 8 where a computer provided with a standard high-performance microprocessor is used. The S-Plus™ statistical software from MathSoft may be used in module 22 to carry out the Stepwise method to select the variables . System 10 is further provided with a parameter interaction module 20, the function of which consists of identifying by statistical analysis from experimental data, which remaining parameters are significantly correlated. The S-Plus statistical software from MathSoft can also be used to program module 20 in which the appropriated correlation methods are applied to the data. It is to be understood that module 20 is unnecessary where all parameters are independent one another.

25 Modules 16, 20 and 22 are linked to a property behavior models module 24 that uses experimental data, parameter interaction data and remaining significant parameters for determining an optimal mathematical model for each property which is likely to better estimate that property. The model data as generated at module 24 is fed to a property behavior relation module 26 that also receives experimental data from module 16 to statistically estimate polynomial coefficients to be incorporated within the established property behavior models, thereby generating a behavior relation for each property. The S-Plus statistical software from MathSoft may be used to program module 26 to apply the appropriate regression methods to the data. System 10 is further provided with a goal function module 28 linked to property weighting module 14 and property behavior relation module 26 to generate, from specified goal values for the

properties, a goal function in term of property weighted deviations between properties as estimated by the behavior relations and the corresponding specified goal values for these properties.

An optimization module 30 is provided to optimize the goal function as established by module 28 through successive iterations and according to the type of each variable (discrete or continuous) and according to one or more ranges specified as constraints imposed on one or more optimal parameter values. Module 30 can be programmed using Matlab™ software supplied by The Math Works Inc to implement network optimization methods. Optimization module 30 is linked to the experimental data entry module 16 to transfer thereto the generated set of optimal parameter values, which module 16 also stores the actual property values obtained from an experimental run based on the set of optimal parameter values. All experimental data is then transferred to the evaluation module 18 as mentioned before.

A preferred embodiment of an optimization method according to the present invention will now be described with reference to Figs. 1 and 2. As illustrated in the general flow chart shown in Fig. 2, the method comprises a first step 40 of assigning values to a set of k property weights w_j representing relative importance of the k properties Y_j for the characterization of the product, which properties are likely to be affected by the parameters of the process, from a modeling of the problem expressed as a hierarchical tree of these properties. Initial modeling and weight value generation are preferably performed using a method known as analytic hierarchy process (AHP), which was first proposed by T.W. Saaty, and more recently described in "Using The Analytic Hierarchy Process For Decision Making In Engineering Applications: Some Challenges" Triantaphyllou et al, International Journal of Industrial Engineering: Application and Practice, Vol. 2, No. 1, pp. 35-44, (1995), which is incorporated herein by reference.

The AHP method consists of building a hierarchical tree from all properties, with one or more hierarchical levels depending on existing relations between the properties. For each level, a pair-wise comparison matrix is built between the properties of this level and presented at an input of the parameters weighting module 14 shown in Fig. 2, which executes in step 40. For each pair-wise comparison, the normalized eigenvector is derived associated with the higher eigen value. The components of this eigenvector give

the relative importance of each property called the local weight. Finally, the above normalized vectors are combined to find the global weight for each property.

In a parallel direction, each pair-wise comparison is associated with a consistency index reflecting the transitivity relation between all comparison by pairs given by the formulator. Multi-criteria analysis software which is commercially available, such as Expertchoice™, Criterium™ or Ergo™, may be used to program module 14. For example, to one or more m main properties classified at a first (higher) level, may correspond one or more groups of properties classified at a second (lower) level, the latter properties being therefore identified as sub-properties. For each main property associated with a group of p sub-properties, a matrix of dimension $[p+1 \times p+1]$ is built and filled, as a result of a pair-wise comparison between each property and sub-property, using relative importance values selected from a standard AHP scale. Next, a suitable algorithm performed by parameter weighting module 14 consists of first calculating the higher eigenvalue of the resulting numerical matrix, and then deriving a normalized relative importance vector of dimension $[p+1]$ by an estimation of the left principal eigenvector of that matrix associated with the calculated main eigenvalue of the input matrix. The above algorithm is then applied to compare the m main properties of the higher level, from a pair-wise comparison matrix of dimension $[m \times m]$ from which a normalized relative importance vector of dimension $[m]$ is derived. Finally, the above normalized vectors are combined according to the hierarchical relations to generate a global relative importance weight vector for the k properties of dimension $[m + \sum p]$ or $[k]$. In practice, it is generally appropriate to retain only each group of sub-properties without the corresponding main property, the sum of the weights related to the retained k properties/sub-properties being always equal to unity.

According to the next step, namely step 42, parameter data and property data values are provided, which data is obtained from experimental runs using different sets of parameter values for the process, the various values for each parameter being preferably selected according to an expected operation range within which an optimal parameter value is likely to be found. The parameters X_i used in the experimental runs should cover the extremes of the expected operational range for each parameter.

Generally, the number of formulation combinations required to determine an optimal formulation depends on many factors among which the more important ones are: 1) the formulation designer experience; 2) complexity of the formulation; 3) the availability of literature and experimental data available on the desired product; and 4) the analytical laboratory workload and throughput. According to the method of the present invention, the minimal number of experimental runs l to perform has been found to be equal to $n+1$, wherein n is the number of relevant parameters involved. A greater number of runs is certainly possible. Step 42 is performed by experimental data entry module 16 shown in Fig.1.

The method then comprises a step 44 of establishing property behavior mathematical relations linking the properties with the parameters and interactions thereof, in polynomial form. These property behavior relations provide an estimated property Y_{e_j} for each of the k properties Y_j in terms of a number n of parameters X_i from the parameter data and associated property data provided at step 42. Step 44 is typically comprised of four sub-steps, namely 1) a parameters reduction step performed by module 22, 2) a parameters interaction analysis step performed by module 20, 3) a property behavior modeling step performed by module 24, and 4) a property behavior relations generating step performed by module 26, as shown in Fig. 1. As to sub-step 1), to provide a more efficient algorithm, from an initial number of identified parameters, the most significant parameters, i.e. those significantly affecting each property, are identified to generate a reduced number n of significant parameters, especially where the initial number of identified parameters is greater than 8, as mentioned before. For that purpose, a statistical analysis algorithm can be used, which is based on parameter correlation calculations using parameter and property experimental data provided at prior step 42. Having obtained data related to l experimental runs involving an initial number p of parameters and a number k properties Y_i , each correlation factor contained in the correlation matrix is retained as significant whenever it complies with a predetermined condition in the following form:

$$a < \rho_{ij} < b \quad \text{or} \quad -c < \rho_{ij} < -d \quad (1)$$

wherein a, b, c and d are predetermined limit values, typically set as follows:

$$0.5 < \rho_{ij} < 0.95 \quad \text{or} \quad -0.95 < \rho_{ij} < -0.5. \quad (2)$$

The parameters associated with the retained correlation factors form the reduced set of n parameters.

5 It can be also shown that a minimum number l of runs at least equal to $n+1$ is required to obtain reliable parameters estimation. Then, parameter interactions, that are in the form $X_i X_j$ with $i \neq j$ and which are significant, can be identified using the above relations (1), with the suggested specific ranges given in (2). The values for X_i from the l experimental runs are combined with the retained correlation factors ρ_{ij} to form a final matrix W , with each element of the first column being equal to unity for the purpose of following sub-step 4). As to sub-step 3), it consists of establishing, for each property Y_j , a best model in terms of retained parameters and parameter interactions. A standard variance analysis is carried out to confirm relevancy of all parameter coefficients and parameter interaction coefficients, and to select by successive variance analysis operations through the use of modules 24, 20 and 22, a suitable model amongst different predetermined models of upgraded degrees, whenever difference in performance between a given model of degree r and a following model of degree $r+1$ is found to be not significant. The resulting best model is taken along with matrix W and property experimental data in matrix Y , as inputs for following sub-step 4) aimed at generating property behavior relations for each property Y_j . A matrix C of coefficient values is given by the matrix:

$$C = (W^T W)^{-1} \times W^T \times Y \quad (8)$$

having a dimension of $[m, k]$, wherein $m = n + t + 1$, t being the number of parameters interactions $X_i X_j$. Hence, estimated property values are given by:

$$Ye = C^T X = \begin{cases} Y_1 = f_1(X_1, \dots, X_n, \dots, X_i X_j) \\ \dots \\ Y_j = f_j(X_1, \dots, X_n, \dots, X_i X_j) \\ \dots \\ Y_k = f_k(X_1, \dots, X_n, \dots, X_i X_j) \end{cases} \quad (9)$$

A following step 46 as shown in Fig. 2 aimed at generating a goal function is carried out by the module 28 shown in Fig. 1, from the set of k property weights w_j produced at step 40, from the property behavior relations produced at step 44 and from the specified goal values for the properties Y_j . The basic goal vector can be expressed as follows:

$$5 \quad g(X_i) = g(X_1, \dots, X_n, \dots, X_i, X_j) = [w_1(Y_1 - O_1), \dots, w_k(Y_k - O_k)] \quad (10)$$

wherein O_i is the specified goal values for the properties Y_i , with $i = 1, \dots, k$.

The goal function to be minimized may be expressed as follows:

$$G(X_1, \dots, X_n) = g^T * g = \sum_{i=1}^k w_i^2 (Y_i - O_i)^2 \quad (11)$$

10 which goal function is expressed in terms of property weighted deviations between estimated values Y_e for the properties Y_j and corresponding specified goal values O_i for the same properties Y_j . A next step 48 as shown in Fig. 2 therefore consists of minimizing the goal function G to obtain a set of optimal parameter values for the parameters X_i , which step 48 is performed by module 30 shown in Fig. 1. 15 Optimization step 48 generally can consider constraints on the parameter values in the form of one or more ranges, typically in a form (a_i, b_i) wherein $a_i < X_i < b_i$, within which optimal parameter values shall be found, according to the type of each variable (i.e. discrete such as binary values, or continuous).

20 The "G" goal function is determined by experimentation. The optimization of the "G" function is a step by step procedure. The first step is to obtain the behavior laws with the best fit between the experimental data and their corresponding ideal value factor.

The second step, the optimization is based on a initial point.

$$25 \quad X^0 = [X_1^0, X_2^0, \dots, X_n^0]$$

and

$$X^{k+1} = X^k - \alpha Hg|_{X=X^k}$$

where

$$g = \nabla G = \text{gradient} G$$

H = the Hessian of G

And based on the following goal function, we use the dimension reduction method by successive iterations

5

$$G(X_1, \dots, X_n) = \sum_{i=1}^k [f_i(X_1, \dots, X_n)]^2$$

these iterations passed by

10

$$f_i(X_1, \dots, X_{n-1}) = 0$$

if $i = 1, \dots, k-1$

and

$$X_n = f_k(X_1, \dots, X_{n-1})$$

Now the goal function can be:

5

$$G(X_1, \dots, X_n) = G(X_1, \dots, X_{n-1}, f_k(X_1, \dots, X_{n-1}))$$

We observe a perfect overlap between the two goal functions and on the stationary point the goal function will be:

20

$$\frac{\partial G(X_r)}{\partial X_i} = \left[\frac{\partial G(X)}{\partial X_i} + \frac{\partial G(X)}{\partial X_n} \frac{\partial f_k(X_1, \dots, X_{n-1})}{\partial X_i} \right]_{X_n = f_k(X_1, \dots, X_{n-1})}$$

These equations supply the maxima and minima of the goal functions including the

$$f_k(X_1, \dots, X_{n-1})$$

maxima and minima from the starting goal function.

25

This mathematical approach induces a reduction of the dimension of the variables, consequently we pass from "n" variables to "n-1" variables. In the actual case, we start

with the most important variables from the behavior laws with the highest weight values of the factor.

5 This approach is known under the name of network optimization, in this case the network nodes are built by the optimal values of the variable by decreasing order of the factor's rank.

10 After the iterative optimization step 48 is completed, although the set of optimal parameter values $X0_i$ obtained can generally be considered as the solution to recommend, that solution is preferably evaluated amongst other alternative solutions by following steps 50 and 52 as shown in Fig. 2. At step 50, an experimental run of the process is carried out using the obtained set of optimal parameter values, to obtain experimental values for the k properties Y_i . The optimal property values $X0_i$ and associated experimental property values are then evaluated at step 52 to obtain ranking thereof amongst a number m of other alternative solutions, which may have been selected from knowledge base 12 shown in Fig. 1. This evaluation is preferably performed by a complete AHP process algorithm, using the set of k property weights w_j as previously obtained through step 40.

CONCRETE APPLICATION

An example illustrating an application of the method according to the present invention in the pharmaceutical field will now be described.

25 Formulation and production process for enalapril maleate tablets were optimized in order to provide a drug product with satisfactory biological performance as well as stability when packaged and stored under ICH (International Conference on Harmonization) conditions. Three (3) independent formulation and process parameters ($n = 3$) were identified as having an impact on the stability of the drug product: 1) the

degree of drug neutralization during granulation (X_1) ; 2) the manufacturing technology (X_2) ; and 3) The drug-to-excipient ratio in the formulation, i.e. dose strength (X_3) .

As to the degree of drug neutralization during granulation (X_1), it was classified as either complete, partial or no neutralization. In the case of complete neutralization, the drug and the alkaline agent were both added to the granulation fluid, i.e. water. Therefore, the alkaline agent neutralized the drug prior to its addition to the powder blend for the granulation procedure. In partial neutralization, both the drug and the alkaline agent were added to the powder blend, blended and water added as the granulation fluid for the granulation procedure. When water and/or alkaline agent were not added to the formulation, the drug was not neutralized. The level of water added as well as the drug-to-alkaline agent ratio were kept constant for all of the formulations. The level of the alkaline agent was determined by the stoichiometry of the reaction.

The manufacturing technology (X_2) was either wet granulation ($X_2 = 0$) or direct compression ($X_2 = 1$). These two technologies are used worldwide for the manufacturing of probably more than 90% of all of the solid oral dosage forms. In the wet granulation technology, the drug and other functional materials added to impart good processing attributes to the drug, often called excipients, are first blended together and agglomerated into larger particles by the addition of a granulating fluid. The role of the granulating fluid is to promote the development of adhesive forces between the materials required for the agglomeration process. After granulation, the granulating fluid is removed by drying. When a direct compression approach is selected as a manufacturing method, the drug is first blended with the excipients and tablets produced without the use of a granulating fluid.

As to the dose strength (X_3), four doses of the product were developed, which were obtained by using two formulations with different drug-to-excipient ratios (continuous parameter values) compressed at different tablet weights.

A total of nine (9) experimental runs involving different formulations based on a combination of the three parameters were prepared, as shown in Table 1.

Run	X_1	X_2	X_3
-----	-------	-------	-------

1	1.73	1	3.33
2	1.73	0	3.33
3	1.73	0	3.33
4	0	0	3.33
5	0	1	3.33
6	6.9	1	13.3
7	6.9	0	13.3
8	6.9	0	13.3
9	0	0	13.3

TABLE 1

The nine formulations covered all of the six (6) possible combinations for the wet granulation technology and three (3) combinations of direction compression. Tablets were manufactured by using enalapril maleate with USP/NF and EP excipients. In the direct compression technology, there is not a sufficient amount of moisture to dissolve all the drug and alkaline agent and provide for any significant neutralization reaction. However, excipients do contain a certain level of adsorbed free moisture capable of creating a microenvironment where small quantities of the drug and alkaline agent can be dissolved and become available for the neutralization reaction. These phenomena could be responsible of the appearance of physical as well as chemical stability problems and where taken into account by evaluating three (3) formulation combinations. The nine (9) formulation combinations were prepared and the tablets were stored in opened containers at 25°C/60%RH and 40°C/75%RH for a 2-week period. These open container studies are typically conducted during the early formulation development phases of a product to purposely accelerate physical and chemical changes in formulations in order to select the lead candidate, i.e., the formulation with the best stability profile. After the 2-week time period, the tablets were removed from the environmental chambers and sent to the analytical department for their performance evaluation. The performance of the formulations was determined by measuring ten ($k=10$) properties as a function of time and temperature, which properties

were selected as follows, according to a hierarchical tree comprising properties and sub-properties:

- Y11, Y12, Y13: % drug dissolved at 5, 15, and 30 min. (sub-properties of Y1);
- Y2: % of cyclization product at time zero;
- Y31, Y32: % cyclization product after 2 weeks at 25°C/60%RH and at 40°C/75%RH (sub-properties of Y3);
- Y4: differential between theoretical and actual assay in mg at time zero;
- Y51, Y52: differential between theoretical and actual assay in mg after 2 weeks at 25°C/60%RH and at 40°C/75%RH (sub-properties of Y5);
- Y6: % hydrolytic product after 2 weeks at 40°C/75%.

Applying the AHP process with the standard scale for these properties, the decision matrixes given in Table 2 for the properties and in Tables 3, 4 and 5 for the sub-properties were built.

Goal	Y1	Y2	Y3	Y4	Y5	Y6
Y1	1.0	(5.0)	(5.0)	3.0	1.0	(5.0)
Y2		1.0	(5.0)	1.0	(3.0)	(7.0)
Y3			1.0	7.0	1.0	1.0
Y4				1.0	(7.0)	(7.0)
Y5					1.0	(1.0)
Y6						1.0

TABLE 2

Y1	Y11	Y12	Y13
Y11	1.0	7.0	9.0
Y12		1.0	3.0
Y13			1.0

TABLE 3

Y3	Y31	Y32
Y31	1.0	(5.0)
Y32		1.0

TABLE 4

Y5	Y51	Y52
Y51	1.0	(5.0)
Y52		1.0

TABLE 5

From the decision matrixes, the following weight values for the $k=10$ properties/sub-properties are given in Table 6, the sum of the weights being equal to unity.

w_1	w_2	w_3	w_4	w_5	w_6	w_7	w_8	w_9	w_{10}
(Y11)	(Y12)	(Y13)	(Y2)	(Y31)	(Y32)	(Y4)	(Y51)	(Y52)	(Y6)
0.060	0.011	0.005	0.098	0.046	0.230	0.039	0.034	0.171	0.305

TABLE 6

Experimental property data that were obtained from nine (9) runs of the process using the selected nine (9) combinations of parameter values of Table 1, are given in Table 7.

Run	Y11	Y12	Y13	Y2	Y31	Y32	Y4	Y51	Y52	Y6
-----	-----	-----	-----	----	-----	-----	----	-----	-----	----

1	90.40	102.7	102.1	0.88	1.210	15.06	0.080	(0.01)	0.660	4.260
2	91.20	95.10	95.80	0.63	1.070	3.510	0.120	0.020	0.340	5.350
3	86.80	100.4	101.6	0.90	0.850	0.720	0.080	0.030	0.110	3.670
4	94.00	96.70	97.20	0.85	1.340	16.88	0.300	0.160	0.780	2.590
5	75.40	106.2	107.1	0.83	1.350	22.54	(0.08)	0.040	0.960	3.570
6	94.70	98.20	98.30	0.54	1.110	8.600	0.380	0.270	2.200	6.730
7	90.20	98.70	98.40	0.64	1.670	5.980	0.310	0.290	1.750	7.710
8	51.70	100.4	100.8	0.50	0.75	0.750	(0.04)	(0.14)	0.310	3.580
9	84.90	95.30	95.20	0.55	0.11	0.110	0.930	0.740	2.210	1.450

TABLE 7

Since $n = 3 < 8$, the parameter reduction step is not required for the purpose of the instant case. As to the statistical analysis of parameters interaction, since a correlation factor $\rho_{13} = 0.7013$ for the $X_1 X_3$ interaction was calculated, that interaction can be considered as significant since the condition $0.5 < \rho_{13} < 0.95$ is satisfied. The following property behavior relations were established:

$$\begin{aligned}
 Y_{11} &= 81.916 + 4.56 X_1 + 4.074 X_2 + 0.224 X_3 - 0.423 X_1 X_3; \\
 Y_{12} &= 101.93 - 1.45 X_1 + 3.81 X_2 - 0.51 X_3 + 0.14 X_1 X_3; \\
 Y_{13} &= 102.16 - 14.8 X_1 + 3.46 X_2 - 0.52 X_3 + 0.14 X_1 X_3; \\
 Y_2 &= 0.92 - 0.025 X_1 + 0.025 X_2 - 0.028 X_3 + 0.0018 X_1 X_3; \\
 Y_{31} &= 1.42 - 0.23 X_1 + 0.057 X_2 - 0.03 X_3 + 0.019 X_1 X_3; \\
 Y_{32} &= 17.18 - 8.78 X_1 + 8.15 X_2 - 0.46 X_3 + 0.56 X_1 X_3; \\
 Y_4 &= -0.15 + 0.0193 X_1 - 0.022 X_2 + 0.08 X_3 - 0.0091 X_1 X_3; \\
 Y_{51} &= -0.135 - 0.028 X_1 + 0.0385 X_2 + 0.066 X_3 - 0.0045 X_1 X_3; \\
 Y_{52} &= 0.00089 - 0.256 X_1 + 0.63 X_2 + 0.166 X_3 + 0.008 X_1 X_3; \\
 Y_6 &= 3.24 + 0.9 X_1 + 0.57 X_2 - 0.13 X_3 - 0.02 X_1 X_3;
 \end{aligned}
 \tag{18}$$

The specified goal values for the properties as given in Table 8 were used to establish the goal function that was minimized to generate the following set of optimal parameters:

$$\begin{aligned} 5 \quad X_1 &= 3.39 \\ X_2 &= 0 \text{ (wet granulation)} \\ X_3 &= 7.46 \end{aligned} \quad (19)$$

The associated experimental property values are given in Table 9.

O_1	O_2	O_3	O_4	O_5	O_6	O_7	O_8	O_9	O_{10}
(Y11)	(Y12)	(Y13)	(Y2)	(Y31)	(Y32)	(Y4)	(Y51)	(Y52)	(Y6)
100.00	100.00	85.00	0.500	0.500	0.500	0.050	0.050	0.050	1.00

TABLE 8

Y11	Y12	Y13	Y2	Y31	Y32	Y4	Y51	Y52	Y6
97	104	106	0.49	0.58	0.73	0.031	0.008	0.047	<0.05%

TABLE 9

- 20 Applying the method for the particular case where only the minimum four ($n+1=3+1=4$) experimental runs required were used, runs 1, 3, 6 and 9 were selected to provide the parameter and property data as given in Table 7. As to the statistical analysis of parameters interaction, since a correlation factor $\rho_{13}=0.332$ for the X_1X_3 interaction was calculated, that interaction cannot be considered as significant
- 25 since $0.5 < \rho_{13} < 0.95$ is not satisfied. The following property behavior relations were established:

$$Y_{11} = 85.36 + 0.99 X_1 + 3.60 X_2 - 0.34 X_3;$$

$$Y_{12} = 101.90 + 0.086 X_1 + 2.30 X_2 - 0.50 X_3;$$

$$Y_{13} = 102.87 + 0.38 X_1 + 0.506 X_2 - 0.58 X_3;$$

$$Y_2 = 1.013 + 0.001 X_1 - 0.019 X_2 - 0.034 X_3;$$

$$5 \quad Y_{31} = 0.88 - 0.038 X_1 + 0.36 X_2 + 0.0095 X_3; \quad (20)$$

$$Y_{32} = 2.88 - 2.425 X_1 + 14.33 X_2 + 0.61 X_3;$$

$$Y_4 = -0.02 - 0.080 X_1 - 0.0007 X_2 + 0.071 X_3;$$

$$Y_{51} = -0.0568 - 0.065 X_1 - 0.02 X_2 + 0.06 X_3;$$

$$Y_{52} = -0.4 - 0.08 X_1 + 0.55 X_2 + 0.2 X_3;$$

$$10 \quad Y_6 = 2.84 + 0.68 X_1 + 0.59 X_2 - 0.1 X_3.$$

The same specified goal values for the properties as given in Table 8 were used to establish the goal function that was minimized to generate the following set of optimal parameters:

$$X_1 = 3.32$$

$$X_2 = 0 \text{ (wet granulation)} \quad (21)$$

$$X_3 = 7.09$$

The associated experimental property values are given in Table 10.

Y11	Y12	Y13	Y2	Y31	Y32	Y4	Y51	Y52	Y6
78	103	106	0.51	0.55	0.73	0.034	0.04	0.029	<0.05%

TABLE 10

Comparing the set of parameter values given at (20) with the former set obtained from all nine (9) experimental runs given at (19), it can be noted that both sets are very similar. Actually, from a pharmaceutical standpoint, they could almost be considered as identical.

What is claimed is:

1. A method of optimizing parameter values in a process of producing a product,
said process being essentially controlled by a set of n parameters X_i affecting a
set of k properties Y_j characterizing the product, said method comprising the
steps of:
 - i) assigning values to a set of k property weights w_j representing
relative importance of said properties Y_j for the characterization of said
product;
 - ii) establishing property behavior mathematical relations giving an
estimated property Y_{e_j} for each said property Y_j in terms of said parameters
 X_i from given parameter data and associated property data;
 - iii) using said property weights w_j to establish a goal function in terms
of property weighted deviations between the estimated properties Y_{e_j} and
corresponding specified goal values for said properties Y_j ; and
 - iv) minimizing the goal function to generate a set of n optimal
parameter values for said parameters X_i .
2. A method according to claim 1, wherein said product is a composition, said set of
optimal parameter values characterizing an optimal formulation for the
composition.
3. A method according to claim 1, wherein said product is a pharmaceutical product,
said set of optimal parameter values characterizing an optimal formulation for the
pharmaceutical product.
4. A method according to claim 1, wherein the values for said property weights w_j
are obtained using an algorithm based on an analytic hierarchy process.

5. A method according to claim 4, wherein said given property data are obtained through a number l of experimental runs of said process using said given parameter data, each said run using a distinct set of values for said given parameter data.

6. A method according to claim 5, wherein $l \geq n+1$.

7. A method according to claim 1, wherein said goal function is expressed as follows:

$$G(X_1, \dots, X_n) = \sum_{j=1}^k w_j^2 (Ye_j - O_j)^2$$

8. wherein O_j are said specified goal values for said properties Y_j . A method according to claim 7, wherein said minimizing step is performed by successive iterations of:

$$G(X_1, \dots, X_n) = \sum_{i=1}^k [f_i(X_1, \dots, X_n)]^2$$

9. A method according to claim 8, wherein said goal function is minimized according to one or more specified ranges (a_i, b_i) wherein $a_i < X_i < b_i$ for one or more of said optimal parameter values.

10. A method according to claim 1, further comprising the steps of:
- performing experimentally said process using said set of optimal parameters values to obtain corresponding experimental values for said properties Y_j ;
 - ranking said set of optimal parameters values over predetermined alternative sets of parameters values for said X_i .

11. A method according to claim 10, wherein said ranking step is performed using an algorithm based on an analytic hierarchy process.

12. A method according to claim 10, further including the step of:

- 5 i) incorporating said set of optimal parameters values and said corresponding experimental values for said properties Y_j respectively into said given parameter and associated property data;
- ii) repeating said steps ii) to iv) to generate a new set of optimal parameters values for said parameters X_i .

10

13. A method of producing a pharmaceutical product using optimized process parameter values, said process being essentially controlled by a set of n parameters X_i characterizing a formulation for said product, said parameters X_i affecting a set of k properties Y_j characterizing the product, said method comprising the steps of:

- 5 a) conducting a number of l of experimental runs of said process each using a selected distinct set of values for said parameters X_i covering substantially all extreme values within a chosen range of values for each one of said parameters X_i , wherein l is at least equal to $n + 1$ and is substantially less than a number used in the Fractional Factorial Matrix method;
- 10 b) measuring values for said properties Y_j characterizing the product in each of said l experimental runs, whereby parameter data and associated property data are obtained from said selected distinct set of values for said parameters X_i and said measured values for said properties Y_j , respectively;
- 25 c) determining an importance of said properties Y_j for the characterization of said product, comparing said importance of said properties Y_j relative to one another, and assigning values to a set of k property weights w_j representing a relative importance of said properties Y_j for the characterization of said product;

d) calculating a set of optimal parameter values for said parameters X_i using said measured values for said properties Y_j and said assigned values of said set of k property weights w_j ; and

e) producing said pharmaceutical product using said optimized process parameter values X_i calculated in the previous step.

14. A method according to claim 13, wherein said step of calculating comprises:

i) establishing property behavior mathematical relations giving an estimated property Ye_j for each said property Y_j in terms of said parameters X_i from said parameter data and associated property data;

ii) using said property weights w_j to establish a process goal function in terms of property weighted deviations between the estimated properties Ye_j and corresponding specified goal values for said properties Y_j ; and

iii) minimizing the process goal function to generate a set of optimal parameter values for said parameters X_i .

15. A method according to claim 14, wherein the values for said property weights w_j are obtained by an algorithm based on an analytic hierarchy process.

16. A method according to claim 14, wherein $l = n + 1$.

17. A method according to claim 14, wherein said goal function is expressed as follows:

$$G(X_1, \dots, X_n) = \sum_{j=1}^k w_j^2 (Ye_j - O_j)^2$$

wherein O_j are said specified goal values for said properties Y_j .

18. A method according to claim 17, wherein said minimizing step is performed through successive iterations.

5

19. A method according to claim 18, wherein said goal function is minimized according to one or more specified ranges (a_i, b_i) wherein $a_i < X_i < b_i$ for one or more of said optimal parameters values.

10

20. A method according to claim 14, further comprising the steps of:
performing experimentally said process using said set of optimal parameters values to obtain corresponding experimental values for said properties Y_j ;
ranking said set of optimal parameters values over predetermined alternative sets of parameters values for said X_i .

15

21. A method according to claim 20, wherein said ranking step is performed through an algorithm based on an analytic hierarchy process.

60152457-090309

20

22. A method according to claim 21, further including the steps of:
incorporating said set of optimal parameters values and said corresponding experimental values for said properties Y_j respectively into said given parameter and associated property data;
repeating said steps a), b) and d) to generate a new set of optimal parameters values for said parameters X_i .

ABSTRACT OF THE DISCLOSURE

A method of optimizing parameter values in a process for producing a product, which process is essentially controlled by a set of parameters affecting a set of properties characterizing the product. The method uses an analytic hierarchy process (AHP) to associate a weight with each property according to its relative importance to obtain desired product characteristics. The method also uses parameter data and measured property data from a required number of experimental runs of the process, from which data property behavior relations between each property and the parameters are statistically established, which relations give estimated property values. Using the property weights, a process goal function is established, which is expressed in terms of weighted deviations between the estimated property values and the corresponding goal values for the properties. Finally, the process goal function is minimized in order to generate a set of optimal parameter values for the process. The AHP process may be further used to evaluate the optimal solution compared to a set of other alternative solutions. The method allows the use of input data obtained from a minimum number of experimental runs, to generate a reliable set of parameter values. An example illustrating an application of the method for the design of a pharmaceutical formulation is described.

September 15, 2000

JAMES ANGLEHART
1981 MCGILL COLLEGE AVENUE
SUITE 1600
MONTREAL, H3A 2Y3
CANADA

This is to inform you that the document requested in your order dated 08-28-2000 is a true reproduction of the official office record copy of that document:

60152457 CERTIFIED PATENT APP AS FILED-MAIL 1
Page 28, is missing.

- ☒ The enclosed Patent Application as Filed is a reproduction of the application as originally filed and has been recorded using high quality scanning or microfilm equipment. Copies of page/papers that were not scannable have not been included, nor have pages/papers received after the original filing date. Copies of these pages/papers may be ordered separately.
- ☐ The enclosed document is a reproduction of the best available source of the official office record copy of that document.

If you have any questions or need additional information, please contact our Customer Service Department.

Mailing Address:

U.S. Patent and Trademark Office
Office of Public Records, Customer Service
Crystal Gateway 4, Suite 300
Washington DC 20231

Delivery Address:

U.S. Patent and Trademark Office
Office of Public Records, Customer Service
1213 Jefferson Davis Highway, Suite 300
Arlington VA 22202

For faster processing of new orders, please specify as appropriate:

Box 9 (Copy Sales) for Uncertified copies, or Box 10 for Certified copies of PTO Documents

Voice: (703) 308-9726 Fax: (703) 308-7048 E-Mail: PTCS@USPTO.GOV or Certdiv@USPTO.GOV

Ref: PRG 297514

Figure No:1

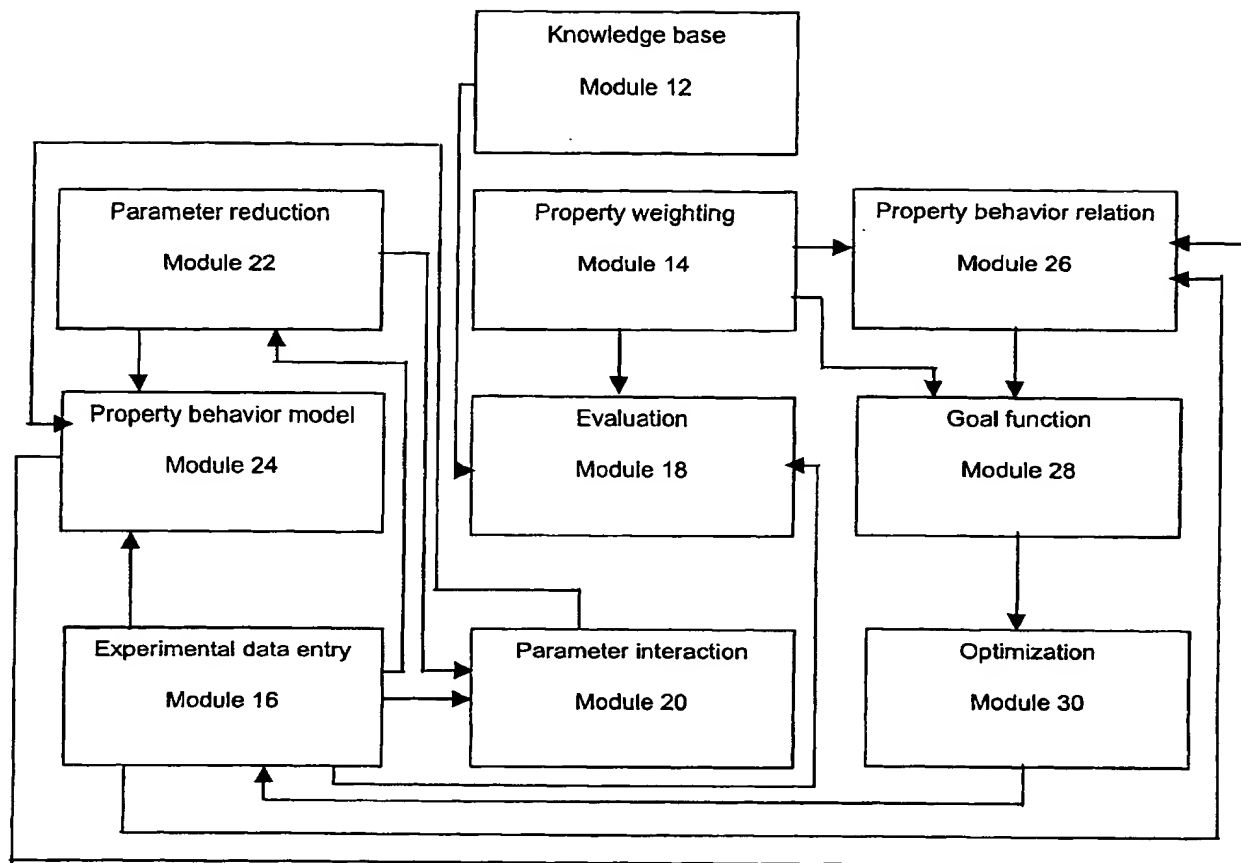


Figure No. 2:

